



INSTRUCTIONS TO INSTALL LID:

1. Place left hand lid on hopper of seeder with handle facing center, as in Picture #1.

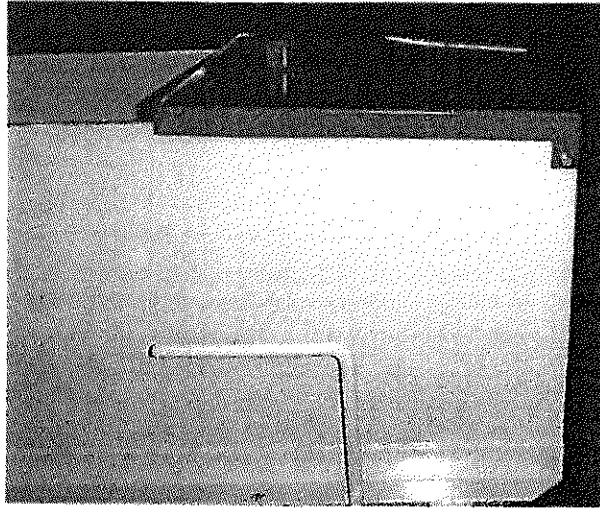

Picture #1

2. Slide lids toward center as far as they will go. Mark on hopper two points through 5/16" hinge-brackets on lid. Drill two 5/16" or 11/32" holes at these points and install 5/16" X 1" bolts and 2 nuts on each side of the hopper.
3. Place right hand lid on hopper with handle facing center as in Picture #2.

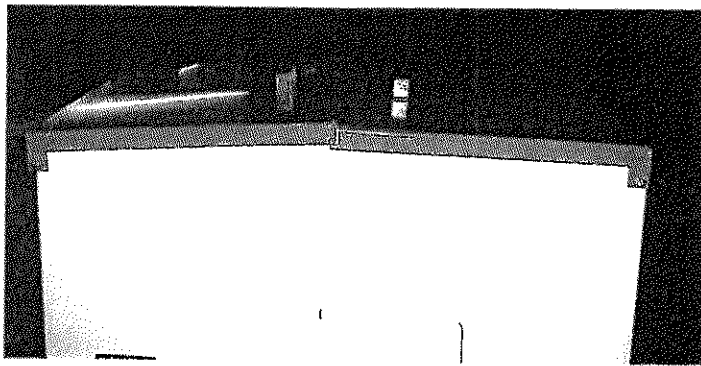

Picture #2

4. Slide lid toward center overlapping right hand lid. Mark on hopper two points through 5/16" hinge-brackets on lid. Drill two 5/16" or 11/32" holes at these points and install 5/16" X 1-1/4" bolts and 2 nuts on each side of hopper.

Herd Seeder Co., Inc.
2383 South U. S. 35
Logansport, IN 46947
Phone: 574-753-6311 Fax: 574-722-4106
www.herdseeder.com info@herdseeder.com